



SECURITY BARRIERS

EB500 Parking

The Avon EB500 Parking Barrier is a rising arm barrier that can be utilised as an automatic traffic barrier for car parks and security control.

The EB500 is 100% duty cycling, allows compliance with BS EN 12453:2017 and is designed for continual high use. It is manufactured to the highest standards; the slim smooth acting barrier is constructed from aluminium and has a rust free environmentally durable IP54 rated cabinet.

The barrier cabinet is slate grey (RAL 7015) powder coated with traffic yellow lid (RAL 1023).

The red and white aluminium boom is easily mounted on the left or right hand side of the cabinet and the maximum boom length is 5m. An in-built safety feature ensures that the barrier automatically reverses direction when an obstruction is met. The barrier has three selectable speeds for each boom arm length.

The versatile controller provides a generous number of pluggable terminals, relays and loop detectors to easily integrate with access control systems. As an option it can be network enabled with a socket for module TCP/IP or RS485 as well as an optional in-built socket for radio (R/F) remote control.

The energy saving 24v brushless motor/gearbox assembly



incorporates a planetary gearing system with sinusoidal movement for a soft start and soft stop action, efficiently using minimal energy to operate when accelerating and decelerating, that results in a smooth elevation or lowering of the barrier arm.

The drive mechanism is accessible through the lockable cabinet and by releasing the removable lid. In an emergency the cabinet houses a lever to manually raise or lower the barrier. Drive components are made of die-cast and lasered steel and the unique spring mechanism assists with the smooth drive and counterbalancing of the boom to minimise operational wear on internal components.



t: +44 (0) 117 953 5252
e: sales@avon-barrier.com
w: www.avon-barrier.com

PRODUCT SPECIFICATION

Physical Dimensions:	Barrier Cabinet W - 360mm D - 300mm H - 1100mm				
Supply Voltage:	88v-264v 47Hz-63Hz				
Boom Length (mm):	2500	3000	3500	4000	5000
Effective Boom Length (mm):	2280	2780	3280	3780	4780
Power Consumption max (W):	180/55/45	85/80/70	80/60/65	75/85/70	195/165/175
Opening and closing time - Medium, approx. [s]*	1.8/1.3/0.9	2.5/1.8/1.3	3.8/2.5/1.8	4.5/3.8/2.8	5.5/4.5/3.8
Barrier weight approx kg (boom weight approx kg)	57 (5)	58 (6)	58 (7)	59 (8)	60 (10)
Boom Construction:	Boom profile is a rectangular extruded aluminium (100 x 50 mm) powder coated (RAL 9010) with red reflective signal stripes. Max length 5000mm Booms can be mounted on the left or right hand as required. 5000mm booms can require an end support (either fixed or swing)				
Barrier Construction:	The aluminium cabinet is powder coated main cabinet RAL 7015 cabinet lid RAL 1023 (other options available) with an IP54 rating				
Installation:	The barrier foundation should consist of grade C25 concrete and it is recommended that the barrier is secured to the foundation using 4 M12 x 160mm chemical anchors. The installation of ducts for cabling is dependent upon the control criteria.				


*Barrier speeds will be factory set to be compliant with latest applicable safety standards

FEATURES

- » 100% duty cycling
- » Energy saving 24v brushless motor gearbox with planetary gear
- » Aluminium rust free cabinet
- » End position detection without limit switches
- » Variable Speeds
- » Six multi functional relays potentially free, max 24V / 1A outputs
- » Three single loop detectors

BENEFITS

- » Reliability for high usage
- » Environmentally durable cabinet
- » Manufactured from sustainable recyclable materials
- » Manual operation in the event of power failure
- » Easy to maintain & upgrade
- » Adaptable to site conditions

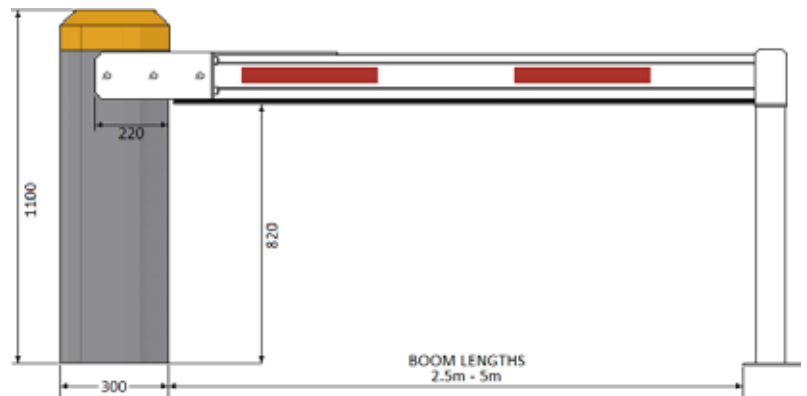

OPTIONS AVAILABLE

- » Access control & intercom systems
- » Inductive Loops
- » LED boom lighting
- » Module for auto open in event of power failure
- » Articulated arm kit (up to 4m)
- » Additional safety features
- » Module for radio remote control receiver
- » Alternative cabinet colours available
- » Module TCP/IP or RS485 for network operation
- » Easy control 'Operator' to control & monitor barrier via Windows-PC



Avon Barrier Corporation Ltd
 Unit A Blackfriars Road
 Nailsea Bristol BS48 4DJ
 United Kingdom
 t: +44 (0) 117 953 5252
 e: sales@avon-barrier.com
 w: www.avon-barrier.com

Avon Barrier reserve the right to change or amend the specification of its products.

Avon EB500 Parking Barrier version 03_25

